

EXPERIENCE SHOWER ONSEN STRUCTURE

The structure of the Onsen shower is fashioned from Myrtha’s world-leading, stainless-steel technology. Also used to create our Onsen Steam Bath, hammam, roman bath and Frigidarium, Myrtha’s stainless-steel systems represent an invigorating revolution in the world of wellness.



Product EXPERIENCE SHOWER ONSEN is certified, and certified versions are available upon request.

AVAILABLE SIZES

MODEL	EXTERNAL SIZES L x W x H (cm)	AREA m²
A	100 x 100 x 245	1,0
B	100 x 190 x 245	1,9
C	190 x 100 x 245	1,9
D	190 x 100 x 245	1,9
E	140 x 140 x 245	1,96
F	140 x 190 x 245	2,66
G	190 x 190 x 245	3,61

DESIGN



COVERING OF THE INTERNAL WALL	Waterproofed and covered with Myrtha finishing. *Myrtha finishing colours: white or black. Note: Myrtha finishing is already precious in itself and does not need to be coated with another material; however it is possible to cover the panels with any material like ceramic, marble, mosaic, etc. Upon request Myrtha can cover the walls already in production with large size ceramics tiles (3,5 mm thick). *Optional: mounted ceramic tiles white, black, white marble effect, black marble effect. Waterproofed and covered with Myrtha finishing.
INTERNAL CEILING	*Myrtha finishing colours: white or black.
DOOR	Sizes 90 x 220 cm in tempered glass, 10 mm thick. Hydraulic pivoting hinges including, closing speed adjustment and the end clock of the leaf. The door can remain open if the opening angle is more than 80°.
HANDLE	Model Onsen in steel - 100 cm long, square section.
LIGHTING	Predispositions.
FRONT WALL	*Panoramic model: front wall in hardened glass, 10 mm thick, crushed-treated. *Standard model: only with glass door.
EXTERNAL FRAME	40 mm thick in solid surface, white or black. Optional: several colors on demand.

TECHNICAL DATA SHEET



STRUCTURE	Modular structure made of prefabricated AISI 441 stainless steel panels 2 mm, calendered together in a solid adhesion by hot polymerization, with a PVC membrane with a thickness of 0.5 mm of high hardness after Shore 97 lamination. Thermal insulation is ensured by coupling insulation panels. The panels that make up the structure are waterproof and covered with Myrtha finishing complete with electrical and plumbing predispositions. All the hydraulic equipment can be inspected, easily maintainable and replaceable.
TECHNOLOGY	Predisposition for accessories.
MAXIMUM CONSUMPTION (kW)	Depend on accessories.
VOLTAGE	Depend on accessories.
SAFETY	Internal emergency button to be connected to an external alarm device.
AIR RECYCLING	no. 1 extraction nozzle.
OPTIONAL	
LIGHTING	no. 2 spot LED on the ceiling.
MUSIC	Audio speakers to be connected to the principal customer source.
EXPERIENCE EQUIPMENT	See technical description.

*Item to be defined



ONSEN SHOWER A

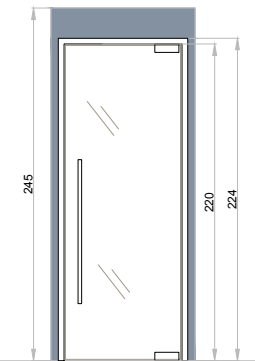



ONSEN SHOWER B

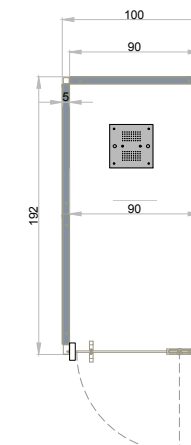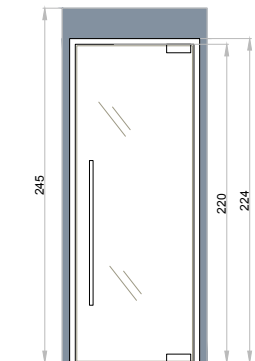



ONSEN SHOWER C

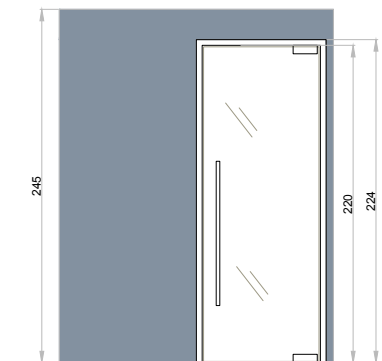

ONSEN SHOWER D

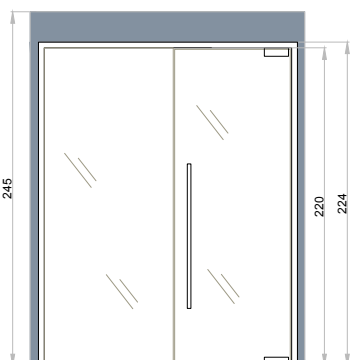

ONSEN SHOWER E

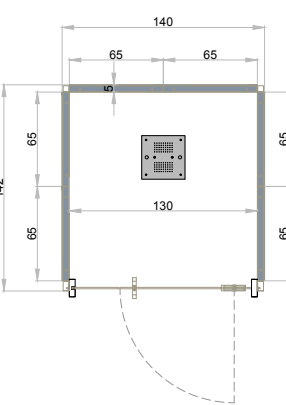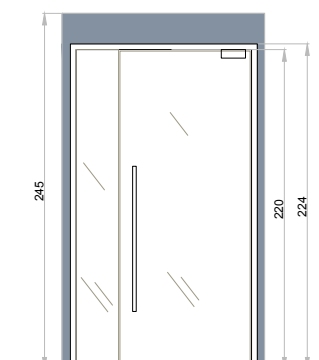

ONSEN SHOWER F

