

WOODEN STRUCTURE PLUG & PLAY

ADVANTAGES



PLUG & PLAY - ALREADY FINISHED



PREFABRICATED WOOD STRUCTURE, HIGH TECHNOLOGICAL CONTENT



THE FINAL RESULT IN THE HANDS OF THE MANUFACTURER



FAST INSTALLATION TIMING (REDUCE 80%)




NO LIMIT TO THE DIMENSIONS



TIMBER OBTAINED FROM REPLANTING




SUSTAINABLE MATERIALS

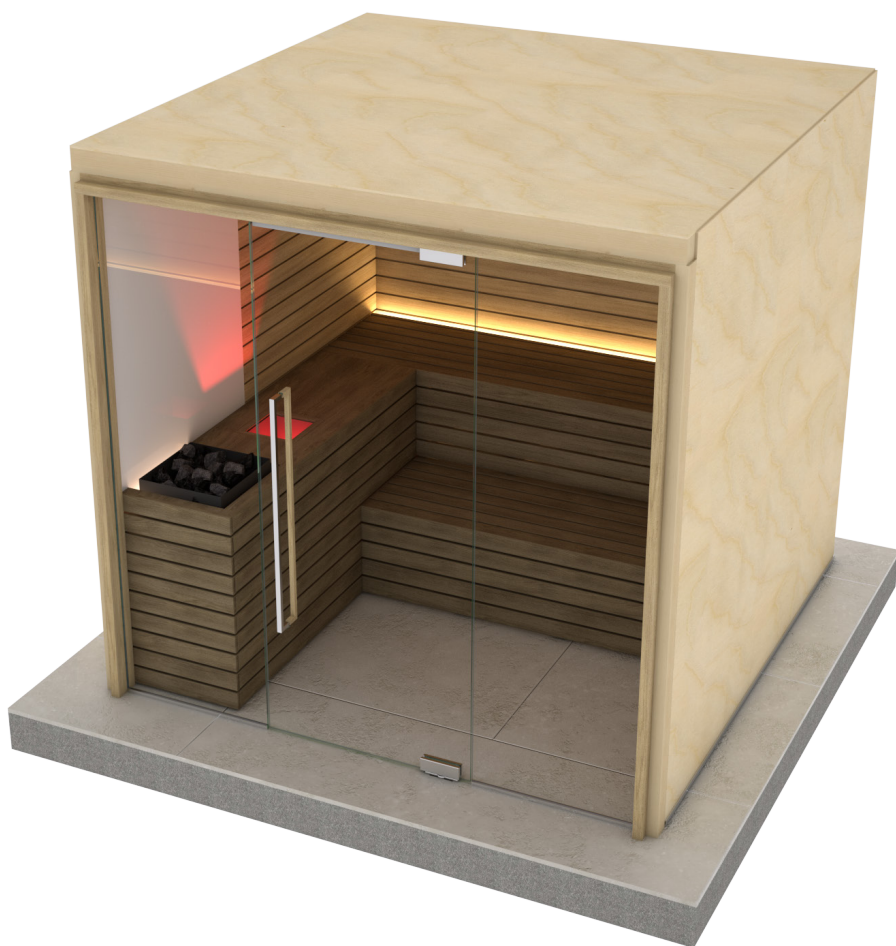


*Product images are artists renderings and may differ from actual products.




STEP 1

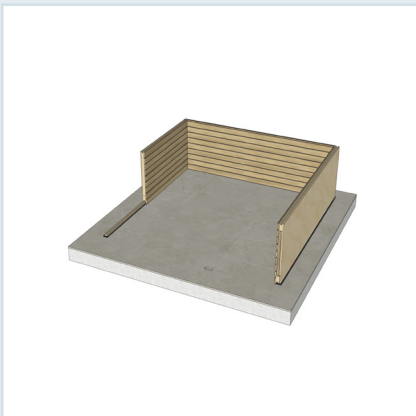

STEP 2

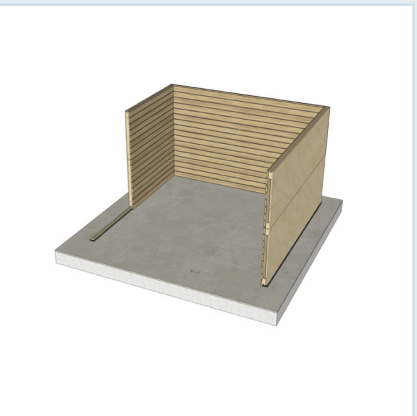

STEP 3

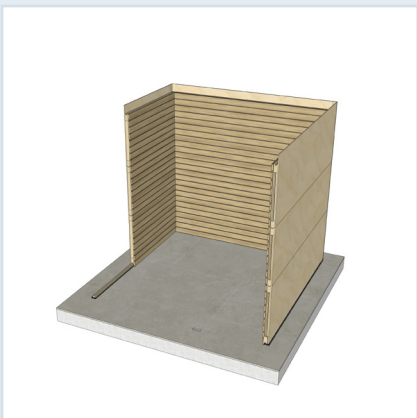


STEP 4



STEP 5



STEP 6

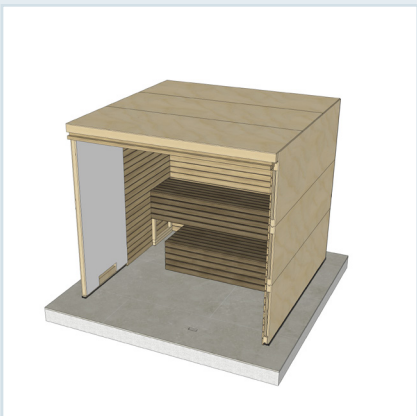

STEP 7



STEP 8



STEP 9



STEP 10



STEP 11

FINNISH SAUNA ELEGANCE

Soft, integrated lighting, a panoramic front wall of windows, and a striking glass panel behind the sauna's stove, create a perfect fusion of Finnish tradition and Italian design.



Product FINNISH SAUNA ELEGANCE is certified, and certified versions are available upon request.

FINISHING BENCHES



FINISHING WALLS AND CEILING



AVAILABLE SIZES


EXTERNAL SIZES L x W x H (cm)	AREA m ²	INTERNAL DIMENSIONS (cm)	BENCH LEVELS	PEOPLE	HEATER CONSUMPTION (kW)	MAXIMUM CONSUMPTION (kW)
150 x 150 x 235	2,3	225,0	1,0	1-2	4,0	4,5
150 x 150 x 235	2,3	225,0	2,0	1-2	4,0	4,5
200 x 150 x 235	3,0	225,0	1,0	2-3	4,0	4,5
200 x 150 x 235	3,0	225,0	2,0	2-3	4,0	4,5
200 x 200 x 235	4,0	225,0	2,0	4-5	6,0	6,5
245 x 200 x 235	4,9	225,0	2,0	5-6	7,5	8,0
245 x 245 x 235	5,9	225,0	2,0	6-7	9,0	9,5
290 x 245 x 235	7,1	225,0	2,0	7-8	9,0	9,5
290 x 290 x 235	8,4	225,0	2,0	8-9	12,0	12,5
290 x 290 x 235	8,4	225,0	3,0	8-9	12,0	12,5
335 x 290 x 235	9,7	225,0	2,0	9-10	15,0	15,5
335 x 290 x 235	9,7	225,0	3,0	9-10	15,0	15,5
335 x 335 x 235	11,2	225,0	3,0	12-13	18,0	18,5
380 x 290 x 240	11,0	225,0	3,0	12	18,0	18,5
380 x 335 x 235	12,7	225,0	3,0	12-13	21,0	21,5
380 x 380 x 235	14,4	225,0	3,0	14-15	21,0	21,5
425 x 290 x 235	12,3	225,0	2,0	10-11	18,0	18,5
425 x 290 x 235	12,3	225,0	3,0	10-11	18,0	18,5
425 x 335 x 235	14,2	225,0	3,0	14-15	21,0	21,5
425 x 380 x 235	16,1	225,0	3,0	16-17	24,0	24,5
470 x 380 x 235	17,9	225,0	3,0	17-18	27,0	27,5

DESIGN

DIMENSIONS (cm)	See table.
NUMBER OF PEOPLE (max)	See table.
COVERING OF THE INTERNAL WALLS	Vertical slats, from 80 mm width/20 mm thick. Available natural solid woods: Fir, Linden or Hemlock
COVERING OF THE BACK OF THE HEATER	*Back-painted glass white, black or in ceramics brown.
COVERING OF THE BENCHES AND OF THE STOVE MASK	Slats in Ayous for Fir and Hemlock version. Slats in Hemlock for Hemlock version. Slats in Linden for Linden version.
DOOR	Sizes 90 x 220 cm, in tempered glass, 10 mm thick. Hydraulic pivoting hinges including closing speed adjustment and the end clock of the leaf. The door can remain open if the opening angle is more than 80°.
HANDLE	Model Onsen: in steel/wood - 100 cm long, square section.
LIGHTING	LED strip under the bench - LED behind the heater.
FRONT WALL	*Standard model: only with glass door. *Panoramic model: with front glass wall in tempered glass, 10 mm thick.
EXTERNAL FRAME	*40 mm width, in the same solid wood of the internal walls.
ACCESSORIES	Thermometer, hygrometer, hourglass, ladle, bucket. Head-rest in Ayous.
BUCKET	Water bucket in wood.
EXTERNAL FINISH	Raw in multilayer wood.

*Item to be defined

DIMENSIONS

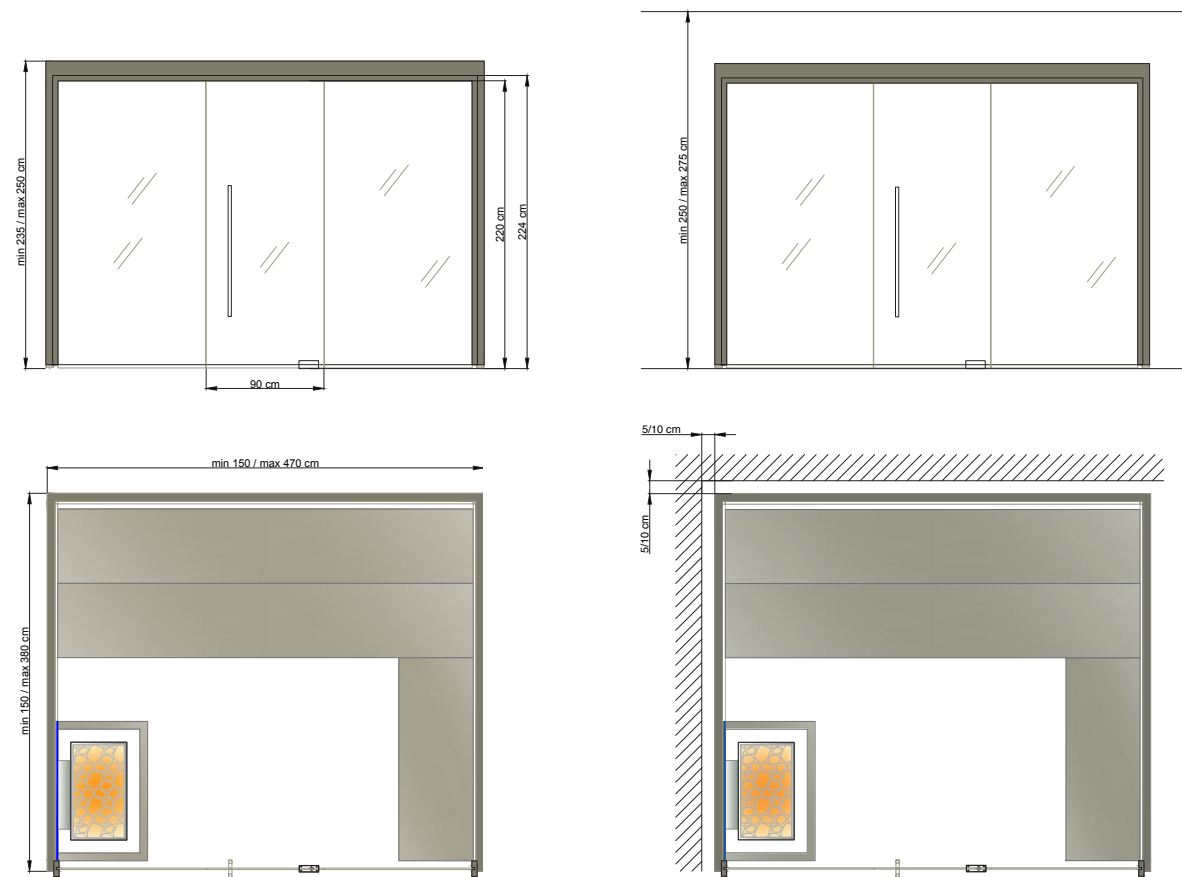

TECHNICAL DATA SHEET

STRUCTURE	Modular self-standing structure made of prefab insulated panels 77 mm thick, provided with tongue and groove connection frames to insure stability. Texture of upright and crossbars in fir.	
	Thermal insulation with high-density rock wool.	
	Steam barrier in aluminium.	
	External covering in multilayer wood.	
	Base structure in adjustable steel (max 10 mm).	
TECHNOLOGY	Finnish Sauna	Sotf Sauna
TEMPERATURE	90°-100° C	50°-60°C
HUMIDITY	10-20%	40-60%
HEATING	High-performance electric heater for commercial use, entirely in steel. Best ratio between stone volume and air convection system for rapid heating times and powerful water infusions. Electronic control unit and temperature probe.	
HEATER CONSUMPTION (kW)	See table.	
MAXIMUM CONSUMPTION (kW)	See table.	
VOLTAGE	According to the country requirement.	
AIR RECYCLING	Suction chimneys on the heater back and extraction chimneys under the bench.	
OPTIONAL	Head-rest: in the same wood essence as the slats.	
	Audio speakers to be connected to the principal customer source.	
	Internal emergency button to be connected to an external alarm device.	
	Pressure safety system over the heater, stopping the unit in case of accidental contact with objects (towels, etc).	



FINNISH SAUNA EMOTION

With its innovative Italian design, a softly lit water tank, integrated into its stove’s cover, and its panoramic front window area, every moment in the Emotion Sauna is a unique and extraordinary experience.



Product FINNISH SAUNA EMOTION is certified. and certified versions are available upon request.

FINISHING BENCHES



FINISHING WALLS AND CEILING



AVAILABLE SIZES

EXTERNAL SIZES L x W x H (cm)	AREA m²	INTERNAL DIMENSIONS (cm)	BENCH LEVELS	PEOPLE	HEATER CONSUMPTIONS (kW)	MAXIMUM CONSUMPTIONS (kW)
150 x 150 x 235	2,3	225,0	1,0	1-2	4,0	4,5
150 x 150 x 235	2,3	225,0	2,0	1-2	4,0	4,5
200 x 150 x 235	3,0	225,0	1,0	2-3	4,0	4,5
200 x 150 x 235	3,0	225,0	2,0	2-3	4,0	4,5
200 x 200 x 235	4,0	225,0	2,0	4-5	6,0	6,5
245 x 200 x 235	4,9	225,0	2,0	5-6	7,5	8,0
245 x 245 x 235	5,9	225,0	2,0	6-7	9,0	9,5
290 x 245 x 235	7,1	225,0	2,0	7-8	9,0	9,5
290 x 290 x 235	8,4	225,0	2,0	8-9	12,0	12,5
290 x 290 x 235	8,4	225,0	3,0	8-9	12,0	12,5
335 x 290 x 235	9,7	225,0	2,0	9-10	15,0	15,5
335 x 290 x 235	9,7	225,0	3,0	9-10	15,0	15,5
335 x 335 x 235	11,2	225,0	3,0	12-13	18,0	18,5
380 x 290 x 240	11,0	225,0	3,0	12	18,0	18,5
380 x 335 x 235	12,7	225,0	3,0	12-13	21,0	21,5
380 x 380 x 235	14,4	225,0	3,0	14-15	21,0	21,5
425 x 290 x 235	12,3	225,0	2,0	10-11	18,0	18,5
425 x 290 x 235	12,3	225,0	3,0	10-11	18,0	18,5
425 x 335 x 235	14,2	225,0	3,0	14-15	21,0	21,5
425 x 380 x 235	16,1	225,0	3,0	16-17	24,0	24,5
470 x 380 x 235	17,9	225,0	3,0	17-18	27,0	27,5

DESIGN

DIMENSIONS (cm)	See table.
NUMBER OF PEOPLE (max)	See table.
COVERING OF THE INTERNAL WALLS	Horizontal slats, from 80 mm width/20 mm thick. *Available natural solid woods: Fir, Linden, Hemlock or Oak.
COVERING OF THE BACK OF THE HEATER	*Back-painted glass, white, black or in ceramics brown.
COVERING OF THE BENCHES AND OF THE STOVE MASK	Slats in Ayous for Fir or Hemlock version. Slats in Hemlock for Hemlock version. Slats in Linder for Linden version. Slats in Thermo wood for Oak version.
DOOR	Sizes 90 x 220 cm, in tempered glass, 10 mm thick. Hydraulic pivoting hinges including closing speed adjustment and the end clock of the leaf. The door can remain open if the opening angle is more than 80°.
HANDLE	Model Onsen: in steel/wood - 100 cm long, square section.
LIGHTING	LED strip in the back of the bench - LED behind the heater - LED in the water container.
FRONT WALL	*Standard model: only with glass door. *Panoramic model: with front glass wall in tempered glass. 10 mm thick.
EXTERNAL FRAME	40 mm width, in the same solid wood of the internal walls.
ACCESSORIES	Thermometer, hygrometer, hourglass, ladle, bucket.
BUCKET	Water bucket integrated into the wood mask of the heater with no. 1 red LED immersed.
EXTERNAL FINISH	Raw in multilayer wood.

*Item to be defined

DIMENSIONS



TECHNICAL DATA SHEET

STRUCTURE	Modular self-standing structure made of prefab insulated panels 77 mm thick, provided with tongue and groove connection frames to insure stability. Texture of upright and crossbars in fir. Thermal insulation with high density rock wool. Steam barrier in aluminium. External covering in multilayer wood. Base structure in adjustable steel (max 10 mm).	
TECHNOLOGY	Finnish Sauna	Soft Sauna
TEMPERATURE	90°-100° C	50°-60° C
HUMIDITY	10-20%	40-60%
HEATING	Electric high performance heater for commercial use, entirely in steel. Best ratio between stone volume and air convection system for rapid heating times and powerful water infusions. Electronic control unit and temperature probe.	
HEATER CONSUMPTIONS (kW)	See table.	
MAXIMUM CONSUMPTIONS (kW)	See table.	
VOLTAGE	According to the country requirement.	
AIR RECYCLING	Suction chimneys on the heater back and extraction chimneys under the bench.	
OPTIONAL	Head-rest: in the same wood essence as the slats. Audio speakers to be connected to the principal customer source. Internal emergency button to be connected to an external alarm device. Pressure safety system over the heater, stopping the unit in case of accidental contact with objects (towels, etc).	




FINNISH SAUNA EMOTION RETRO

Positioned out of the way, the sauna's stove is integrated into the back of the bench. The large glass panel on the back wall and the panoramic front windows combine to help make a visit to the sauna a relaxing, restoring experience.



Product FINNISH SAUNA RETRO EMOTION is certified. and certified versions are available upon request.

FINISHING BENCHES



FINISHING WALLS AND CEILING



AVAILABLE SIZES


EXTERNAL SIZES L x W x H (cm)	AREA m²	INTERNAL DIMENSIONS (cm)	BENCH LEVELS	PEOPLE	MAXIMUM CONSUMPTION (kW)
245 x 245 x 235	5,9	225	2	6-7	9,5
290 x 290 x 235	8,4	225	3	8-9	12,5
335 x 290 x 235	9,7	225	3	9-10	15,5
380 x 290 x 240	11,0	225	3	12	18,5
380 x 335 x 235	12,7	225	3	13-14	21,5
380 x 380 x 235	14,4	225	3	14-15	21,5
425 x 290 x 235	12,3	225	3	13-14	18,5

DESIGN

DIMENSIONS (cm)	See table.
COVERING OF THE INTERNAL WALL AND CEILING	Horizontal slats, 80 mm width /20 mm thick. *Available natural solid woods: Fir, Linden, Hemlock or Oak.
COVERING OF THE BACK OF THE HEATER	*Back-painted glass, white, black or in ceramics brown.
COVERING OF THE BENCHES	Slats in Ayous for Fir and Hemlock version. Slats in Hemlock for Hemlock version. Slats in Linden for Linden version. Slats in Thermo wood for Oak version.
DOOR	Sizes 90 x 220 cm, in tempered glass, 10 mm thick. Hydraulic pivoting hinges including closing speed adjustment and the end clock of the leaf. The door can remain open if the opening angle is more than 80°.
HANDLE	Model Onsen: in steel/wood - 100 cm long, square section.
LIGHTING	LED strip in the back of the bench - LED behind the heater.
FRONT WALL	*Standard model: only with glass door. *Panoramic model: with front glass wall in tempered glass, 10 mm thick.
EXTERNAL FRAME	40 mm width, in the same solid wood of the internal walls.
ACCESSORIES	Thermometer, hygrometer, hourglass, ladle, bucket.
BUCKET/WATER LOADING	Manual. Water bucket at the last level of the benches connected to the heater with hidden pipelines (automatic system optional).
EXTERNAL FINISH	Raw in multilayer wood.

*Item to be defined

DIMENSIONS

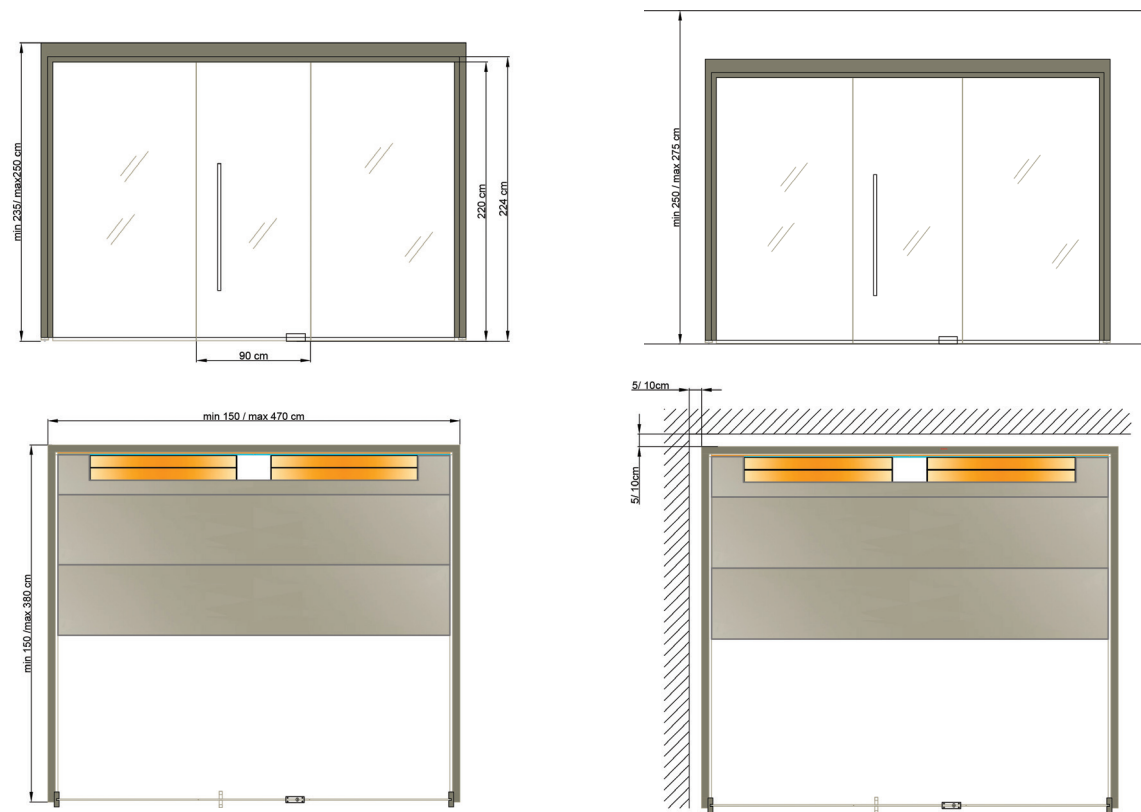

TECHNICAL DATA SHEET

STRUCTURE	Modular self-standing structure made of prefab insulated panels 77 mm thick, provided with tongue and groove connection frames to insure stability. Texture of upright and crossbars in fir. Thermal insulation with high density rock wool. Steam barrier in aluminum. External covering in multilayer wood. Base structure in adjustable steel (max 10 mm).
TECHNOLOGY	Finnish Sauna.
TEMPERATURE	90°-100° C
HUMIDITY	10-20%
HEATING	Electric high performance heater for commercial use, entirely in steel, retro bench. Best ratio between stone volume and air convection system for rapid heating times and powerful water infusions. Electronic control unit and temperature probe.
HEATER CONSUMPTION	See table.
MAXIMUM CONSUMPTION	See table.
VOLTAGE	According to the country requirement.
SAFETY	Internal emergency button to be connected to an external alarm device . Protection grid over the heater.
AIR RECYCLING	Suction chimneys retro heater and extraction chimneys under the bench.
OPTIONAL	Head-rest: in the same wood essence as the slats. Audio speakers to be connected to the principal customer source. Automatic system of water and essences loading to the retro heater. Internal emergency button to be connected to an external alarm device.




FINNISH SAUNA ONSEN

The Finnish sauna is a way to discover the ancient rituals. Onsen, from the Japanese word referring to a spa is a relaxing and familiar sauna.



Product FINNISH SAUNA ONSEN is certified, and certified versions are available upon request.

FINISHING BENCHES



FINISHING WALLS AND CEILING



AVAILABLE SIZES

EXTERNAL SIZES L x W x H (cm)	AREA m²	INTERNAL DIMENSIONS (cm)	BENCH LEVELS	PEOPLE	HEATER CONSUMPTION (kW)	MAXIMUM CONSUMPTION (kW)
150 x 150 x 235	2,3	225,0	1	1-2	4,0	4,5
150 x 150 x 235	2,3	225,0	2	1-2	4,0	4,5
200 x 150 x 235	3,0	225,0	1	2-3	4,0	4,5
200 x 150 x 235	3,0	225,0	2	2-3	4,0	4,5
200 x 200 x 235	4,0	225,0	2	4-5	6,0	6,5
245 x 200 x 235	4,9	225,0	2	5-6	7,5	8,0
245 x 245 x 235	5,9	225,0	2	6-7	9,0	9,5
290 x 245 x 235	7,1	225,0	2	7-8	9,0	9,5
290 x 290 x 235	8,4	225,0	2	8-9	12,0	12,5
290 x 290 x 235	8,4	225,0	3	8-9	12,0	12,5
335 x 290 x 235	9,7	225,0	2	9-10	15,0	15,5
335 x 290 x 235	9,7	225,0	3	9-10	15,0	15,5
335 x 335 x 235	11,2	225,0	3	12-13	18,0	18,5
380 x 290 x 240	11,0	225,0	3	12	18,0	18,5
380 x 335 x 235	12,7	225,0	3	12-13	21,0	21,5
380 x 380 x 235	14,4	225,0	3	14-15	21,0	21,5
425 x 290 x 235	12,3	225,0	2	10-11	18,0	18,5
425 x 290 x 235	12,3	225,0	3	10-11	18,0	18,5
425 x 335 x 235	14,2	225,0	3	14-15	21,0	21,5
425 x 380 x 235	16,1	225,0	3	16-17	24,0	24,5
470 x 380 x 235	17,9	225,0	3	17-18	27,0	27,5

DESIGN

DIMENSIONS (cm)	See table.
NUMBER OF PEOPLE (max)	See table.
COVERING OF THE INTERNAL WALLS	Horizontal slats, from 35 mm width/20 mm thick. *Available natural solid woods: natural Linden, Hemlock, Oak or Red Cedar.
COVERING OF THE BACK OF THE HEATER	*Back-painted glass, white or black or in ceramics brown.
COVERING OF THE BENCHES AND OF THE STOVE MASK	Slats in Ayous for Hemlock. Slats in Linden for Linden version. Slats in Red Cedar for Red Cedar version. Slats in Thermo wood for Oak version.
DOOR	Sizes 90 x 220 cm, in tempered glass, 10 mm thick. Hydraulic pivoting hinges including closing speed adjustment and the end clock of the leaf. The door can remain open if the opening angle is more than 80°.
HANDLE	Model Onsen: in steel/wood - 100 cm long, square section.
LIGHTING	LED strip in the back of the bench - LED behind the heater - LED in the water container.
FRONTAL WALL	*Standard model: only with glass door. *Panoramic model: with front glass wall in tempered glass, 10 mm thick.
EXTERNAL FRAME	40 mm width, in the same solid wood of the internal walls.
ACCESSORIES	Thermometer, hygrometer, hourglass, ladle, bucket.
BUCKET	Water bucket integrated into the wood mask of the heater with no. 1 red LED immersed.
EXTERNAL FINISH	Raw in multilayer wood.

* Item to be defined

DIMENSIONS



TECHNICAL DATA SHEET

STRUCTURE	Modular, self-standing structure made of prefab, insulated panels, 77 mm thick, provided with tongue and groove connection frames to insure stability. Texture of upright and crossbars in fir. Thermal insulation with high-density rock wool. Steam barrier in aluminium. External covering in multilayer wood. Base structure in adjustable steel (max 10 mm).	
	TECHNOLOGY	Finnish Sauna Soft Sauna
TEMPERATURE	90°-100° C	50°-60° C
HUMIDITY	10-20%	40-60%
HEATING	Electric high-performance heater for commercial use, entirely in steel. Best ratio between stone volume and air convection system for rapid heating times and powerful water infusions. Electronic control unit and temperature probe.	
HEATER CONSUMPTION (kW)	See table.	
MAXIMUM CONSUMPTION (kW)	See table.	
VOLTAGE	According to the country requirement.	
AIR RECYCLING	Suction chimneys on the heater back and extraction chimneys under the bench.	
OPTIONAL	Head-rest: in the same wood essence as the slats.	
	Audio speakers to be connected to the principal customer source.	
	Internal emergency button to be connected to an external alarm device.	
	Pressure safety system over the heater, stopping the unit in case of accidental contact with objects (towels, etc).	



FINNISH SAUNA EVOLUTION

Essential in terms of lines and enriched by lights and fragrances. Elegance is the classic dry sauna typical of the Finnish tradition, whose temperatures vary between 90° and 100°C.



Product FINNISH SAUNA EVOLUTION is certified. and certified versions are available upon request.

FINISHING BENCHES



FINISHING WALLS AND CEILING



AVAILABLE SIZES


EXTERNAL SIZES L x W x H (cm)	AREA m²	INTERNAL DIMENSIONS (cm)	BENCH LEVELS	PEOPLE	HEATER CONSUMPTION (kW)	MAXIMUM CONSUMPTION (kW)
150 x 150 x 235	2,3	225,0	1,0	1-2	4,0	4,5
150 x 150 x 235	2,3	225,0	2,0	1-2	4,0	4,5
200 x 150 x 235	3,0	225,0	1,0	2-3	4,0	4,5
200 x 150 x 235	3,0	225,0	2,0	2-3	4,0	4,5
200 x 200 x 235	4,0	225,0	2,0	4-5	6,0	6,5
245 x 200 x 235	4,9	225,0	2,0	5-6	7,5	8,0
245 x 245 x 235	5,9	225,0	2,0	6-7	9,0	9,5
290 x 245 x 235	7,1	225,0	2,0	7-8	9,0	9,5
290 x 290 x 235	8,4	225,0	2,0	8-9	12,0	12,5
290 x 290 x 235	8,4	225,0	3,0	8-9	12,0	12,5
335 x 290 x 235	9,7	225,0	2,0	9-10	15,0	15,5
335 x 290 x 235	9,7	225,0	3,0	9-10	15,0	15,5
335 x 335 x 235	11,2	225,0	3,0	12-13	18,0	18,5
380 x 290 x 240	11,0	225,0	3,0	12	18,0	18,5
380 x 335 x 235	12,7	225,0	3,0	12-13	21,0	21,5
380 x 380 x 235	14,4	225,0	3,0	14-15	21,0	21,5
425 x 290 x 235	12,3	225,0	2,0	10-11	18,0	18,5
425 x 290 x 235	12,3	225,0	3,0	10-11	18,0	18,5
425 x 335 x 235	14,2	225,0	3,0	14-15	21,0	21,5
425 x 380 x 235	16,1	225,0	3,0	16-17	24,0	24,5
470 x 380 x 235	17,9	225,0	3,0	17-18	27,0	27,5

DESIGN

DIMENSIONS (cm)	See table.
NUMBER OF PEOPLE (max)	See table.
COVERING OF THE INTERNAL WALLS	Vertical or orizontal slats, from 90 mm width/16 mm thick. *Available natural solid woods: Fir, Hemlock or Poplar.
COVERING OF THE BACK OF THE HEATER	*Back-painted glass, white or black.
COVERING OF THE BENCHES AND OF THE STOVE MASK	Slats in Ayous for Fir and Hemlock version. Slats in Hemlock for Hemlock version. Slats in poplar in Poplar version.
DOOR	Sizes 90 x 220 cm, in tempered glass, 10 mm thick. Hydraulic pivoting hinges including closing speed adjustment and the end clock of the leaf. The door can remain open if the opening angle is more than 80°.
HANDLE	Model Onsen: in steel/wood - 100 cm long, square section.
LIGHTING	LED strip in under the bench - LED behind the heater.
FRONT WALL	*Standard model: only with glass door. *Panoramic model: with front glass wall in tempered glass. 10 mm thick.
EXTERNAL FRAME	40 mm width, in the same solid wood of the internal walls.
ACCESSORIES	Thermometer, hygrometer, hourglass, ladle, bucket.
BUCKET	Water bucket integrated in wood.
EXTERNAL FINISH	Raw in multilayer wood.

*Item to be defined

DIMENSIONS

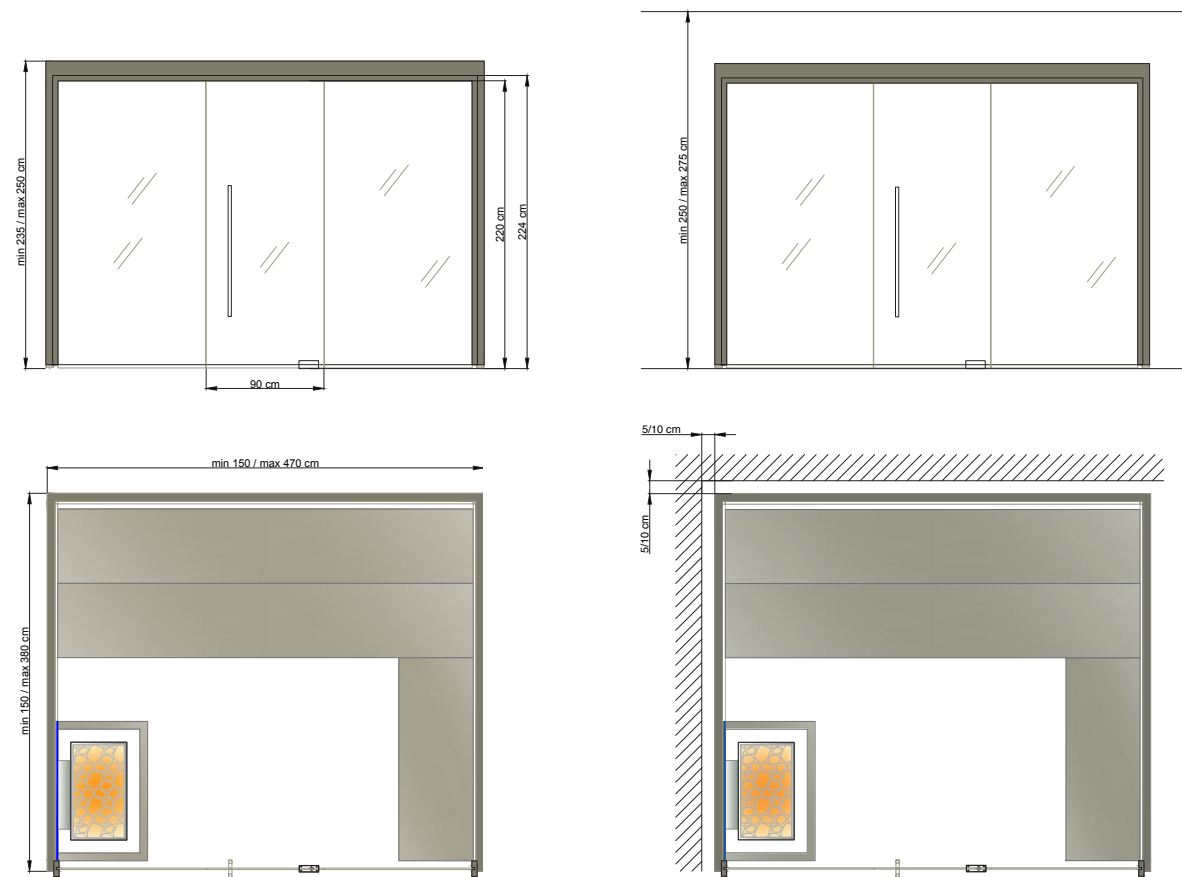

TECHNICAL DATA SHEET

STRUCTURE	Modular self-standing structure made of prefab insulated panels 77 mm thick, provided with tongue and groove connection frames to insure stability. Texture of upright and crossbars in fir. Thermal insulation with high density rock wool. Steam barrier in aluminum. External covering in multilayer wood. Base structure in adjustable steel (max 10 mm).
TECHNOLOGY	Finnish Sauna.
TEMPERATURE	90°-100° C
HUMIDITY	10-20%
HEATING	Electric high performance heater for commercial use, entirely in steel. Best ratio between stone volume and air convection system for rapid heating times and powerful water infusions. Electronic control unit and temperature probe.
HEATER CONSUMPTION	See table.
MAXIMUM CONSUMPTION	See table.
VOLTAGE	According to the country requirement.
AIR RECYCLING	Suction chimneys on the heater back and extraction chimneys under the bench.
OPTIONAL	Head-rest in Ayous. Audio speakers to be connected to the principal customer source. Internal emergency button to be connected to an external alarm device. Pressure safety system over the heater, stopping the unit in case of accidental contact with objects (towels, etc).




FINNISH SAUNA DREAM

New from Myrtha Wellness, Dream is a sauna experience infused with imagination to take your breath away, while yielding a tranquil whisper soulful relaxation. Utilizing the latest technology and the finest materials, Dream Sauna is the culmination of the Myrtha Wellness philosophy. Designed for private and professional use in spas and hotel suites, it also offers an exceptional home sauna experience. The innovative and clean-line design, the infusion of fragrant wood essences, the ergonomic relaxation seats, the panoramic front window, and the fully adjustable internal microclimate, make our exceptional new sauna a Dream... come true.




Product FINNISH SAUNA DREAM is certified, and certified versions are available upon request.

FINISHING BENCHES



Ayou

FINISHING WALLS AND CEILING



Wenge

DESIGN

DIMENSIONS (cm)	L 185 x W 160 x H 238
NUMBER OF PEOPLE (max)	2
COVERING OF THE INTERNAL WALLS	Wenge wood panels.
CEILING	Inclined wenge wood panels.
COVERING OF THE BACK OF THE HEATER	In ceramic brown.
COVERING OF THE BENCHES AND OF THE STOVE MASK	Slats in Ayous, a-thermal and chip-free wood.
DOOR	Sizes 90 x 220 cm, in tempered glass, 10 mm thick. Hydraulic pivoting hinges including closing speed adjustment and the end clock of the leaf. The door can remain open if the opening angle is more than 80°.
HANDLE	Model Onsen: in steel/wood - 100 cm long, square section.
LIGHTING	no. 2 spot LED on the ceiling - no. 1 LED in the water container.
FRONT WALL	Panoramic model: with front glass wall in tempered glass. 10 mm thick.
EXTERNAL FRAME	40 mm width in Ayous.
ACCESSORIES	Thermometer, hygrometer, hourglass, ladle, bucket.
BUCKET	Water bucket integrated into the wood mask of the heater.
EXTERNAL FINISH	Raw in multilayer wood.

TECHNICAL DATA SHEET

STRUCTURE	Modular self-standing structure made of prefab insulated panels, provided with tongue and groove connection frames to insure stability. Texture of upright and crossbars in Fir. Thermal insulation with high density rock wool. Steam barrier in aluminum. External covering in multilayer wood. Base structure in adjustable steel (max 10 mm).
TECHNOLOGY	Finnish Sauna.
TEMPERATURE	90°-100° C
HUMIDITY	10-20%
HEATING	Electric high performance heater for commercial use, entirely in steel. Best ratio between stone volume and air convection system for rapid heating times and powerful water infusions. Electronic control unit and temperature probe.
HEATER CONSUMPTION	4,00 kW
MAXIMUM CONSUMPTION	4,50 kW
VOLTAGE	According to the country requirement.
AIR RECYCLING	Suction chimneys on the heater back and extraction chimneys under the bench.
OPTIONAL	Audio speakers to be connected to the principal customer source. Internal emergency button to be connected to an external alarm device. Pressure safety system over the heater, stopping the unit in case of accidental contact with objects (towels, etc).

*Item to be defined


FINNISH SAUNA VELVET

Velvet Sauna, a new, sensual Myrtha Wellness creation, is brought to life through coloured features that combine the latest technology with the essence of design. Our new sauna experience is at once, soothing, calming, and unforgettable.



Product FINNISH SAUNA VELVET is certified, and certified versions are available upon request.

FINISHING BENCHES



FINISHING WALLS AND CEILING



AVAILABLE SIZES

EXTERNAL SIZES L x W x H (cm)	AREA m²	INTERNAL DIMENSIONS (cm)	BENCH LEVELS	PEOPLE	HEATER CONSUMPTIONS (kW)	MAXIMUM CONSUMPTIONS (kW)
150 x 150 x 235	2,3	225,0	1,0	1-2	4,0	4,5
150 x 150 x 235	2,3	225,0	2,0	1-2	4,0	4,5
200 x 150 x 235	3,0	225,0	1,0	2-3	4,0	4,5
200 x 150 x 235	3,0	225,0	2,0	2-3	4,0	4,5
200 x 200 x 235	4,0	225,0	2,0	4-5	6,0	6,5
245 x 200 x 235	4,9	225,0	2,0	5-6	7,5	8,0
245 x 245 x 235	5,9	225,0	2,0	6-7	9,0	9,5
290 x 245 x 235	7,1	225,0	2,0	7-8	9,0	9,5
290 x 290 x 235	8,4	225,0	2,0	8-9	12,0	12,5
290 x 290 x 235	8,4	225,0	3,0	8-9	12,0	12,5
335 x 290 x 235	9,7	225,0	2,0	9-10	15,0	15,5
335 x 290 x 235	9,7	225,0	3,0	9-10	15,0	15,5
335 x 335 x 235	11,2	225,0	3,0	12-13	18,0	18,5
380 x 290 x 240	11,0	225,0	3,0	12	18,0	18,5
380 x 335 x 235	12,7	225,0	3,0	12-13	21,0	21,5
380 x 380 x 235	14,4	225,0	3,0	14-15	21,0	21,5
425 x 290 x 235	12,3	225,0	2,0	10-11	18,0	18,5
425 x 290 x 235	12,3	225,0	3,0	10-11	18,0	18,5
425 x 335 x 235	14,2	225,0	3,0	14-15	21,0	21,5
425 x 380 x 235	16,1	225,0	3,0	16-17	24,0	24,5
470 x 380 x 235	17,9	225,0	3,0	17-18	27,0	27,5

DESIGN

DIMENSIONS (cm)	See table.
NUMBER OF PEOPLE (max)	See table.
COVERING OF THE INTERNAL WALLS	Horizontal slats, 80 mm width /20 mm thick. Available natural solid woods: fir with wax treatment white or black.
COVERING OF THE BACK OF THE HEATER	*Back-painted glass, white, black or in ceramics brown.
COVERING OF THE BENCHES AND OF THE STOVE MASK	Slats in fir with colored wax treatment: white or black.
DOOR	Sizes 90 x 220 cm, in tempered glass, 10 mm thick. Hydraulic pivoting hinges including closing speed adjustment and the end clock of the leaf. The door can remain open if the opening angle is more than 80°.
HANDLE	Model Onsen: in steel/wood - 100 cm long, square section.
LIGHTING	LED strip under the bench - LED behind the heater.
FRONT WALL	*Standard model: only with glass door. *Panoramic model: with front glass wall in tempered glass, 10 mm thick.
EXTERNAL FRAME	40 mm widt in the same solid wood of the internal walls.
ACCESSORIES	Thermometer, hygrometer, hourglass, ladle, bucket.
BUCKET	Water bucket integrated in wood.
EXTERNAL FINISH	Raw in multilayer wood.

*Item to be defined

DIMENSIONS



TECHNICAL DATA SHEET

STRUCTURE	Modular self-standing structure made of prefab insulated panels 77 mm thick, provided with tongue and groove connection frames to insure stability. Texture of upright and crossbars in fir. Thermal insulation with high density rock wool. Steam barrier in aluminum. External covering in multilayer wood. Base structure in adjustable steel (max 10 mm).
TECHNOLOGY	Finnish Sauna.
TEMPERATURE	90°-100° C
HUMIDITY	10-20%
HEATING	Electric high performance heater for commercial use, entirely in steel. Best ratio between stone volume and air convection system for rapid heating times and powerful water infusions. Electronic control unit and temperature probe.
HEATER CONSUMPTION	See table.
MAXIMUM CONSUMPTION	See table.
VOLTAGE	According to the country requirement.
AIR RECYCLING	Suction chimneys on the heater back and extraction chimneys under the bench.
OPTIONAL	Head-rest in fir with colored wax treatment: white or black. Audio speakers to be connected to the principal customer source. Internal emergency button to be connected to an external alarm device. Pressure safety system over the heater, stopping the unit in case of accidental contact with objects (towels, etc).

